

# 790



# GEOLINER® 790 PRECISION MEASUREMENT SYSTEM WITH AUTOMATIC VEHICLE HEIGHT TRACKING ADJUSTS TO THE HEIGHT OF THE VEHICLE.

## VERSATILE, ACCURATE HARDWARE

- Wireless communication – eliminates connections between the camera towers and the cabinet easing mobility and providing a variety of installation configurations
- Continuous third camera calibration provides accurate readings and reliable alignment results

## SPEED AND PRODUCTIVITY



- Automatic vehicle height tracking – the camera system follows the height of the vehicle, eliminating the need to adjust the aligner when you move the lift
- Get readings in less than two minutes on a wide variety of vehicles and wheel sizes
- Comprehensive vehicle specification database with frequent updates ensures you always have the information to do the job right



## PRO42 PLATINUM SOFTWARE

The productivity enhancing Pro42 PLATINUM software: features automated caster sweep, help videos, rolling radius\*, cross diagonal\*, A-arm and cradle adjust, EZ toe\*, EZ Access\* and Quick Align Check. Plus the advanced measurement feature which includes ProAckermann, graphical caster trail, scrub radius and SAI as well as input of vehicle ride height.

The software allows integration with a wide variety of shop management software such as asanetwork.

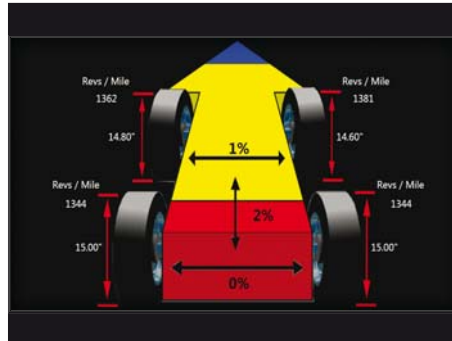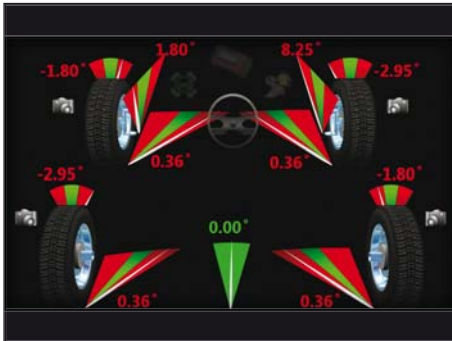

## AC400 QUICK WHEEL CLAMPS WITH XD TARGETS



### Secure clamping without touching the rim

- Only the tyre is contacted
- Clutch limited clamping force ensures accurate and repeatable results
- Durable and lightweight magnesium construction
- Alternatively, AC100 universal wheel clamps made of cast aluminum, with no limitation on tyre diameter

### AC400: Fast and easy to use

- Clamping is accomplished with a single fast-action adjustment knob
- No accessories needed to accommodate the full range of tyre sizes
- Large, comfortable handle allows ergonomic use
- XD targets are lighter and take up less space than previous designs

### Automatic caster sweep

System automatically detects when the steering wheel is turned and initiates the caster sweep function

### Rolling radius\*

Identify mismatched tyre sizes – a potential cause of vehicle pulling and drive train damage

### Cross diagonal\*

Identify frame or structural issues before alignment adjustments are made

### A-arm adjust

Compound meter provides visual reference for simultaneous caster and camber adjustment for vehicles with adjustable control arms

### Cradle adjust

Compound meter provides visual reference for simultaneous SAI and caster adjustment for vehicles with front sub-frames/cradles

### EZ-Toe\*

Turn the front wheels and access difficult adjustment points while still displaying centred toe readings

\* Patented and / or patent-pending features

# 790



# geoliner®

WHEEL ALIGNMENT SYSTEMS

## SPECIFICATIONS

Track Width	1220 mm – 2440 mm (48" – 96")
Wheel Base	2010 mm – 4570 mm (79" – 180")
Shipping Weight	227 kg (501 lbs)
Power Requirements	230 V 1Ph 50/60 Hz
UL201, C22.2, CE Approved	

## AC400 Specifications

Tyre diameter	48.3 cm – 99.1 cm (19" – 39")
Weight	3.13 kg
Clamping force	164.6 N
Construction	Cast magnesium

## AC100 Specifications

Rim clamping range	11" – 22"
Weight	4.9 to 5.2 kg (10.9 to 11.5 lbs)
Construction	Cast aluminium

## Standard accessories

Steering Wheel Holder  
Brake Pedal Depressor  
Remote Control  
TIP (Ride Height Target)  
Colour Inkjet Printer  
Two Wheel Chocks

## OPTIONAL ACCESSORIES

Dual Wheel Adaptor Kit for AC400 Clamps:  
EAK0305J50A

Mobility Kit:  
EAK0305J78A  
(Includes Portable Platform & Docking Cleats  
for Both Towers)

Portable Platform for Towers:  
EAK0305J58A

Docking Cleats for Portable Platform:  
EAK0305J77A

AC100 Universal Wheel Clamps\*:  
EAK305J83A

AC400 Wheel Clamps\*\*:  
EAK0305J85A



\* Standard on geoliner 790 AC100

\*\* Standard on geoliner 790 AC400

### EMEA-JA

Snap-on Equipment s.r.l. - Via Prov. Carpi, 33 - 42015 Correggio (RE)  
Phone: +39 0522 733-411 - Fax: +39 0522 733-479 - [www.hofmann-europe.com](http://www.hofmann-europe.com)

### France

Snap-on Equipment France - ZA du Vert Galant - 15, rue de la Guivernone BP 97175  
Saint-Ouen-l'Aumône - 95056 Cergy-Pontoise CEDEX  
Phone: +33 134 48 58-78 - Fax: +33 134 48 58-70 - [www.hofmann-france.fr](http://www.hofmann-france.fr)

### Germany

Snap-on Equipment GmbH - Konrad-Zuse-Straße 1 - 84579 Unterneukirchen  
Phone: +49 8634 622-0 - Fax: +49 8634 5501 - [www.hofmann-deutschland.com](http://www.hofmann-deutschland.com)

### Italy

Snap-on Equipment s.r.l. - Via Prov. Carpi, 33 - 42015 Correggio (RE)  
Phone: +39 0522 733-411 - Fax: +39 0522 733-410 - [www.hofmann-italia.it](http://www.hofmann-italia.it)

### United Kingdom

Snap-on Equipment Ltd. - Unit 17 Denney Road, King's Lynn - Norfolk PE30 4HG  
Phone: +44 118 929-6811 - Fax: +44 118 966-4369 - [www.snapon-equipment.co.uk](http://www.snapon-equipment.co.uk)

Part of the machines is illustrated with optional extras which are available  
at extra cost. Technical and visual modifications reserved.

Cod.: 9702 609 - 10/2016



**HOFMANN**